

Speed of Sound wave

$$v = \sqrt{\frac{B}{\rho}}$$

$B \equiv$  Bulk Modulus  
 $\rho =$  density

$$v = \sqrt{\frac{T}{\mu}} \quad \text{— Speed in a string (16.8)}$$

$$\rightarrow v_{\text{mechanics}} = \sqrt{\frac{\text{elastic property}}{\text{inertial property}}}$$

check Table 17.1  
Page 514

Speed of sound also depends on the temperature

$$v = 331 \left(\frac{m}{s}\right) \sqrt{1 + \frac{T_c}{273^\circ C}}$$

## 17.2. Periodic Sound Waves

$$S(x, t) = S_{\text{max}} \cos(kx - \omega t)$$

$S_{\text{max}}$  = maximum position of the element relative to the equilibrium.

$$\Delta p = \Delta p_{\text{max}} \sin(kx - \omega t)$$

$$= \rho v \omega S_{\text{max}} \sin(kx - \omega t)$$

Derivation

$$\Delta p = -B \frac{\Delta V}{V_i} \quad (12.8)$$

$$= -B \frac{A \Delta S}{A \Delta x} = -B \frac{\Delta S}{\Delta x} = -B \frac{\partial S}{\partial x}$$

$$\therefore \Delta p = -B \frac{\partial}{\partial x} [S_{\text{max}} \cos(kx - \omega t)] = B S_{\text{max}} k \sin(kx - \omega t)$$

$$\text{But } B = \rho v^2, \quad k = \frac{\omega}{v}$$

$$\therefore \Delta p = \rho v^2 S_{\text{max}} k \sin(kx - \omega t) = \rho v^2 \frac{\omega}{v} S_{\text{max}} \sin(kx - \omega t)$$

$$\therefore \Delta p = \rho v \omega S_{\text{max}} \sin(kx - \omega t)$$

### 17.3 Intensity of the periodic sound wave.

$$v(x, t) = \frac{\partial}{\partial t} S(x, t) = \frac{\partial}{\partial t} \left[ S_{\max} \cos(kx - \omega t) \right]$$

$$= -\omega S_{\max} \sin(kx - \omega t)$$

at  $t=0$ . the kinetic energy is

$$\Delta K = \frac{1}{2} \Delta m v^2 = \frac{1}{2} \Delta m \left[ -\omega S_{\max} \sin(kx - \omega t) \right]_{t=0}^2$$

$$= \frac{1}{2} \rho A \Delta x (\omega S_{\max})^2 \sin^2(kx)$$

if  $\Delta x \rightarrow \text{small} \rightarrow dx$

$$dK = \frac{1}{2} \rho A dx \omega^2 S_{\max}^2 \sin^2(kx)$$

$$K_{\lambda} = \int dK = \int_0^{\lambda} \frac{1}{2} \rho A \omega^2 S_{\max}^2 \sin^2(kx) dx$$

$$= \frac{1}{2} \rho A \omega^2 S_{\max}^2 \int_0^{\lambda} \sin^2(kx) dx$$

$$= \frac{1}{4} \rho A \omega^2 S_{\max}^2 \lambda$$

Total mechanical energy  $E_{\lambda}$

$$E_{\lambda} = K_{\lambda} + U_{\lambda} = \frac{1}{4} \rho A \omega^2 S_{\max}^2 \lambda + \frac{1}{4} \rho A \omega^2 S_{\max}^2 \lambda$$

$$= \frac{1}{2} \rho A (\omega S_{\max})^2 \lambda$$

$\mathcal{P} = \frac{\Delta E}{\Delta t}$  = rate of energy transfer

$$= \frac{\frac{1}{2} \rho A (\omega S_{\max})^2 \lambda}{T} = \frac{1}{2} \rho A (\omega S_{\max})^2 \left( \frac{\lambda}{T} \right)$$

$$= \frac{1}{2} \rho A v (\omega S_{\max})^2$$

$$\mathcal{I} \equiv \frac{\mathcal{P}}{A} = \frac{1}{2} \rho v (\omega S_{\max})^2 = \frac{\Delta P_{\max}^2}{2 \rho v}$$

Now Consider a point Source

$$I = \frac{P_{av}}{A} = \frac{P_{av}}{4\pi r^2} \sim \frac{1}{r^2}$$

Decibels db  $\beta$

$$\beta = 10 \log \left( \frac{I}{I_0} \right), \quad \begin{array}{l} I_0 = \text{reference intensity} \\ = \text{threshold of hearing} \\ = 1.0 \times 10^{-12} \frac{\text{W}}{\text{m}^2} \end{array}$$


= dB

= dB

$$I = \frac{\text{Watts}}{(\text{in})^2}$$

17.4 Doppler Effect

Intensity again, consider the same  $\Delta x$  ( $dx$ ) volume element of air,

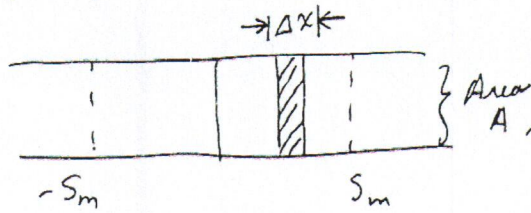

$$\text{Mass } dm = \rho A dx$$

$$\begin{aligned} dE_k &= \frac{1}{2} dm v_s^2 = \frac{1}{2} dm \left[ \frac{\partial s}{\partial t} \right]^2 = \frac{1}{2} dm \left[ \frac{\partial}{\partial t} S_m \cos(kx - \omega t) \right]^2 \\ &= \frac{1}{2} dm \left[ \omega S_m \sin(kx - \omega t) \right]^2 \\ &= \frac{1}{2} (\rho A dx) \omega^2 S_m^2 \sin^2(kx - \omega t) \end{aligned}$$

$$\frac{dE_k}{dt} = \frac{1}{2} \rho A v \omega^2 S_m^2 \sin^2(kx - \omega t) \equiv \text{Rate of Change in Kinetic Energy.}$$

$$\begin{aligned} \overline{\left( \frac{dE_k}{dt} \right)} &= \frac{1}{2} \rho A v \omega^2 S_m^2 \overline{\sin^2(kx - \omega t)} \\ &= \frac{1}{4} \rho A v \omega^2 S_m^2 \Rightarrow \overline{\left( \frac{dE_k}{dt} \right)} = \frac{1}{4} \rho A v \omega^2 S_m^2 \end{aligned}$$

$$\boxed{I = \frac{2 \left( \overline{\frac{dE_k}{dt}} \right)}{A} = \frac{1}{2} \rho A v \omega^2 S_m^2}$$

Assume the rate change of potential energy is the same as that of Kinetic energy.

4. Beats. — the difference between two combining frequencies, ~~that~~ <sup>these two fs</sup> are be very close

$$S_1 = S_m \cos(\omega_1 t) \quad , \quad S_2 = S_m \cos(\omega_2 t)$$

$$S = S_1 + S_2 = S_m [\cos \omega_1 t + \cos \omega_2 t]$$

$$= S_m \cdot 2 \cos \frac{1}{2} (\omega_1 - \omega_2) t \cdot \cos \frac{1}{2} (\omega_1 + \omega_2) t$$

$$= [2 S_m \cos \omega' t] \cos \omega t, \quad \begin{aligned} \omega' &= \frac{1}{2} (\omega_1 - \omega_2) \\ \omega &= \frac{1}{2} (\omega_1 + \omega_2) \end{aligned}$$

$$S = [2S_m \cos \omega' t] \cos(\omega t), \quad \omega > \omega'$$

- treat this as a function <sup>of  $\cos \omega' t$</sup>  with  $2S_m \cos \omega' t$  Amplitude, 1
- $\cos \omega t$  function with  $2S_m \cos \omega' t$ .
- Maximum amplitude occurs when  $\cos \omega' t = \pm 1$   
 $\rightarrow \frac{1}{2}(\omega_1 - \omega_2)t = \pm 2\pi$
- during a repetition of  $\cos \omega t$ , maximum amplitude happens Twice, therefore

$$\cos 2\pi \left(\frac{f_1 - f_2}{2}\right)t = \pm 1$$

page 529


$$\omega_{\text{beat}} = 2\omega' = 2 \cdot \frac{1}{2}(\omega_1 - \omega_2)$$

$$= \omega_1 - \omega_2$$


But  $\omega = 2\pi f$ .

$$\rightarrow \boxed{f_{\text{beat}} = |f_1 - f_2|}$$


5. Doppler Effect - The detected sound frequency change due to relative motion of the source and detector.
- True for wave, (EM + Sound)
  - Radar detector of police use Doppler Effect to detect the speed of car (Using Microwave)

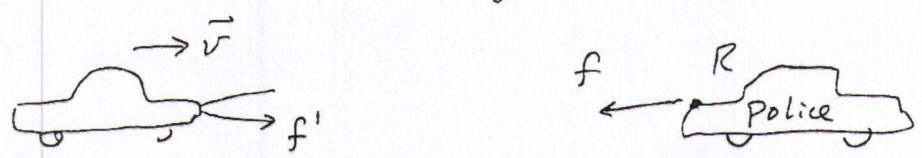

Due to misalignment, the actual detected speed of the car may be different

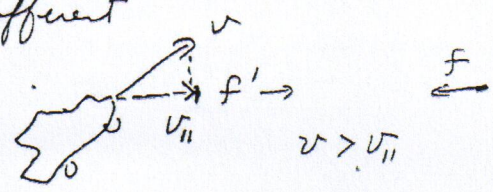

# 5-1. Detector Moving ; Source Stationary

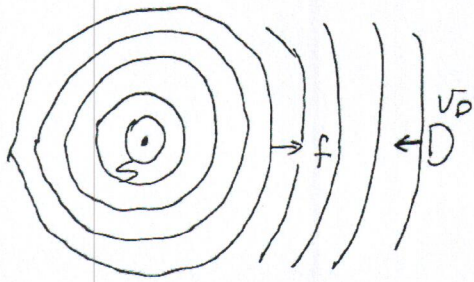


Since the detector is moving, for a given interval of time  $\Delta t$ , detector will intercept more wave fronts.

$$f' > f$$

In time  $t$ , the wave front move to the right  $vt$ .

- ① Source  $\rightarrow vt$  distance  
 detector  $\leftarrow v_D t$   
 distance  $d_{s,d}$

$$\lambda = \frac{v}{f}$$



$$\begin{aligned} \text{Detect frequency } f' &= \frac{(vt + v_D t) / \lambda}{t} = \frac{v + v_D}{\lambda} \\ &= \frac{(v + v_D) f}{v} \end{aligned}$$

$$f' = f \left( \frac{v + v_D}{v} \right) \quad \text{— detector towards Source}$$

- ② Source  $\rightarrow vt$  distance  
 detector  $\rightarrow v_D t$  distance  
 $d_{s,d} = vt - v_D t$


$$f' = f \left( \frac{v - v_D}{v} \right) \quad \text{— detector away from Source}$$

$$\Rightarrow f' = f \left( \frac{v \pm v_D}{v} \right)$$

## 5-2. Source moving; detector stationary

— When sources are moving, the wave length changes,

① when S moves toward D



Wave front,  $W_1$   $vT$  during a period time  $T$

Source move  $v_s T$  " "  $T$ , and emits a 2<sup>nd</sup> wave front,  $W_2$

— The distance between the  $W_1$  and  $W_2$  is the detected wave length of  $\lambda'$

$$\lambda' = vT - v_s T$$

$$f' = \frac{v}{\lambda'} = \frac{v}{vT - v_s T} = \frac{v}{\frac{v}{f} - \frac{v_s}{f}} = f \frac{v}{v - v_s}$$

② when S moves away from D

$$f' = \frac{v}{\lambda} = \frac{v}{vT + v_s T} = \frac{v}{\frac{v}{f} + \frac{v_s}{f}} = f \frac{v}{v + v_s}$$

$$\Rightarrow \boxed{f' = f \frac{v}{v \mp v_s}}$$

General form

$$\boxed{f' = f \frac{v \pm v_D}{v \mp v_s}}$$

— for both source and detector are moving

$$\begin{array}{c} v > v_D \\ > v_s \\ > \end{array}$$

$$f' = f (v \pm v_D) (v \mp v_s)^{-1}$$

$$= f \left( 1 \pm \frac{v_D}{v} \right) \left( 1 \mp \frac{v_s}{v} \right)^{-1}$$

$$= f \left[ 1 \pm \frac{v_D}{v} + \dots \right] \left[ 1 \mp \frac{v_s}{v} + \dots \right] \quad u = |v_s \pm v_D|$$

$$= f \left( 1 \pm \frac{v_s}{v} \pm \frac{v_D}{v} + \frac{v_s v_D}{v^2} + \dots \right)$$



$$= f \left( 1 \pm \frac{v_s \pm v_D}{v} + \dots \right) \Rightarrow \boxed{f' = f \left( 1 \pm \frac{u}{v} \right)}$$

$$f' = f \frac{v \pm v_D}{v \mp v_S}$$

When  $v = v_S$  towards the ~~source~~ detector,  $f' \rightarrow \infty$

Shock wave appears

$\rightarrow$  Sonic boom

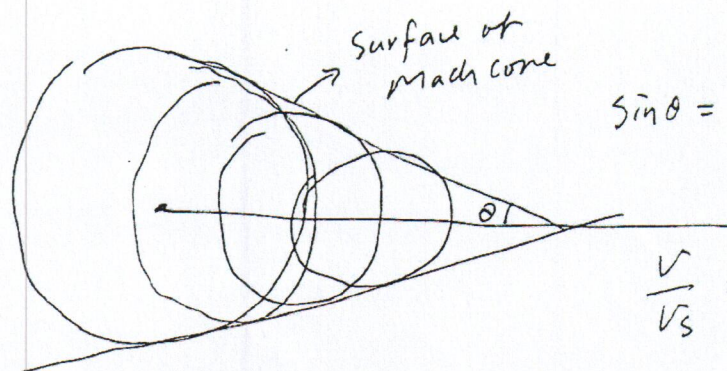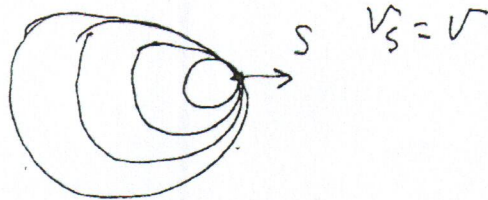

$$\sin \theta = \frac{vt}{v_S t} = \frac{v}{v_S}$$

$$\frac{v}{v_S} = \text{Mach number}$$

## 6. Doppler Effect of light.

$$f' = f \left( 1 \pm \frac{u}{c} \right) \quad \text{— for light wave; } u \ll c$$

$$\lambda' = \lambda \left( 1 \pm \frac{u}{c} \right)^{-1} \approx \lambda \left( 1 \mp \frac{u}{c} \right)$$

$$\text{or } \frac{\lambda' - \lambda}{\lambda} = \mp \frac{u}{c}$$

$$\text{or } \frac{\lambda' - \lambda}{\lambda} = \frac{\Delta \lambda}{\lambda} = \mp \frac{u}{c} \quad , \Delta \lambda \text{ Doppler shift.}$$

— Measure the relative speed of a light source by measuring the Doppler shift.